

KOBELCO

ED160BR-7

Performance  Design

ED160 *BLADE RUNNER*

■ Bucket capacity:
0.24 – 0.7 m³ ISO heaped

■ Engine power:
86 kW/2,200 min⁻¹
(ISO14396)

■ Operating weight:
16,800 – 18,000 kg



Complies with the EU Stage V
exhaust emission regulation

Built for Perfectionists™



Performance Design

ED160BR of KOBELCO has realised a completely new value by harmonising PERFORMANCE – greater efficiency and productivity with an increased power and speed and DESIGN – operator-based operability and comfort, refusing to accept any compromises.

In pursuit of unique and matchless machines which are unforgettable once you use them, KOBELCO will continue to rise to meet every challenge.



THE ULTIMATE IN SIMPLE AND ELEGANT DESIGN

Our pursuit of functional beauty and aesthetic sense produced a new interior design.

Jog dial

This jog dial integrates multiple functions to realise simple operations. Even with gloved hands, the operator can set various machine conditions without stress.

LED backlights

The switches and dials have LED backlights – they provide a bright, clear view in the dark and set a luxurious mood.







UNFORGETTABLE COMFORT

① Air suspension seat

A GRAMMER seat is installed as standard equipment, which achieves excellent shock absorption and superior ride comfort.

② Air conditioner blowing from the rear

Air is blown against the operator's waist and the back of their head, offering more comfortable operation.

③ Lever angles allow for comfortable operations

The operator can move the levers horizontally without twisting their wrist, which reduces the fatigue caused by the operations.



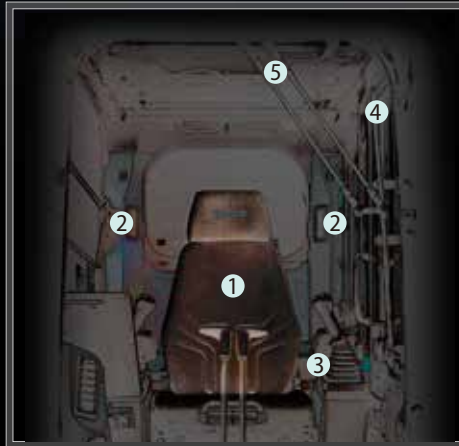
New hydraulic control

Our newly upgraded hydraulic control system responds to shorter lever strokes than current models, delivering swifter, more precise movement and improved lever operability.

④ LED door light

The LED interior light automatically turns on when the door is opened or when the ignition is set to OFF. This ensures easy entry and exit at nighttime.

⑤ Parallel wipers secure a wide field of view



KOBELCO



04:33



SETTING MENU



PICTURE OF
CAMERA



CLOCK
SETTING



SCREEN
BRIGHTNESS



MAINTENANCE



CONSUMPTION



LANGUAGE
SELECTION



FLOW
RATE 260 L/min

A WIDER VIEW BRINGS A WIDER RANGE OF USE

10-inch colour monitor (the largest in the industry)

The easy-to-operate menu screen facilitates reading of important information. Images from the built-in cameras can be checked on the large screen, which helps secure safety. In addition, each icon has become easy to recognise. A password is required when starting the engine for greater security.



The right camera and rear camera (right side view mode)



The right camera and rear camera (straight view mode)



The bird's-eye view




The eagle eye view




Right and rear cameras

Images from the right camera and rear camera are displayed together on the large colour monitor. The right camera view can be selected between the straight view mode and right side view mode. In addition, the bird's-eye view mode and eagle eye view mode can also be selected.

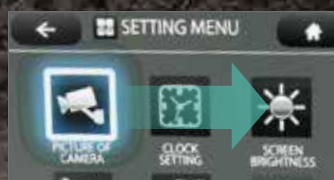

Screen display linked with the jog dial operation

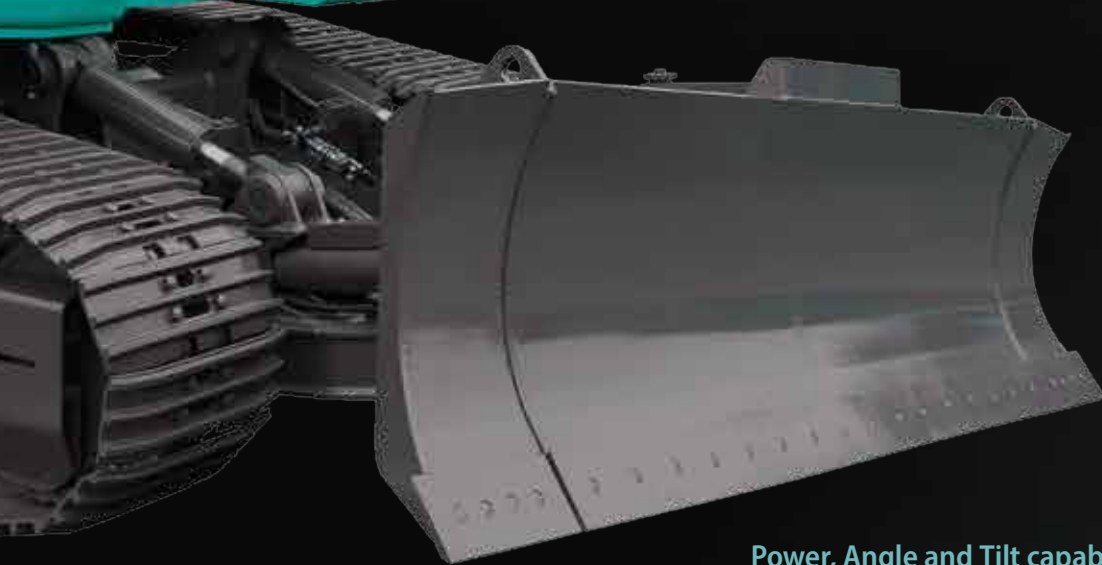The jog dial can be operated as desired without causing stress. Turn the jog dial to the right or left to select an item and press the dial to confirm the selection.



Power, Angle and Tilt capability (PAT)

The 6-way dozer blade has Power, Angle and Tilt capability (PAT) operated from the cab. With a single control lever, the blade can be angled 25 degrees to the left or right for dispensing earth and materials away from the operator's path. The blade also tilts up on the left and right sides by 445 mm for slope grading, culverts and ditches.

EXPERIENCING A COMPETENT PERFORMANCE

Our high-power engine complies with STAGE V emission regulations

Compared to previous models, the engine output is significantly increased, which thereby shortens the digging cycle time remarkably. It attains high performances without reducing the speed even when heavy a load is applied or when travelling on a slope.

Model: ISUZU 4JJ1XDDV A01

Engine output

Increased by **10 %**

(Compared to the ED160BR-5 model)

Digging cycle time

Shortened by **10 %**

(Compared to the ED160BR-5 model)



Large capacity dozing

ED160 Blade Runner has the power to doze and backfill in all recommended operating positions.

Dimensions:

3,260 mm (width) x **810 mm** (height)

Working ranges:

790 mm (height), **600 mm** (depth)

Drawbar pulling force: **195 kN**

Dozer capacity: **1.6 m³**



Plenty of ground clearance

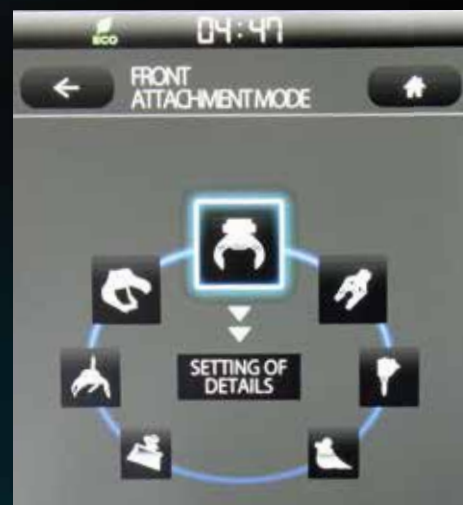
Excellent ground clearance ensures unhindered travel.






GREATER MULTI-FUNCTION CAPABILITIES





Attachment mode

The two work-rate modes of the bucket, breaker, nibbler, and rotating grapple are set before delivery, which allows you to start operating immediately. Mode settings for other attachments, such as the tilt rotator, can easily be added or changed.



TYPES OF ATTACHMENT MODE

| | TYPE | MODE | OBJECTIVE OF MODE |
|--------------|---|-------------------|---|
| CURRENT MODE |  | Bucket | Balance in operations such as levelling can be adjusted. |
| |  | Breaker | Arm regeneration function considering front attachment weight is provided beforehand. |
| |  | Nibbler (crusher) | Change of arm speed due to nibbler (crusher) opening/closing is reduced. |



| | TYPE | MODE | OBJECTIVE OF MODE |
|------------------|--|-------------------------------|---|
| NEWLY ADDED MODE |  | Rotating grapple | Swing operation on slope while raising attachment/equipment becomes possible. Boom 2-speed systems is controlled by proportional valve. |
| |  | Processor | N&B flow rate is set to maximum specifically. Regeneration of arm in operation while using front attachment is changed. |
| |  | Thumb bucket | Swing operation while raising attachment/equipment and opening thumb bucket becomes possible. |
| |  | Tilt rotator | When combined operation with arm is performed, hydraulic interference is prevented. |
| | | Spare mode for custom setting | This mode should be customized at each field. This is provided for front attachment other than those described above. |

Adjustment for hydraulic flow

Divide ratio of hydraulic flow can be adjusted by service factory for custom usage.



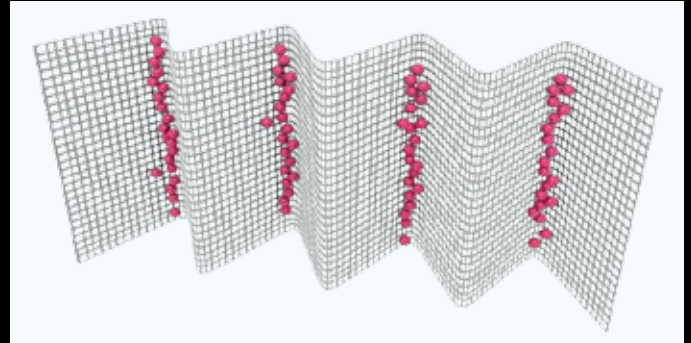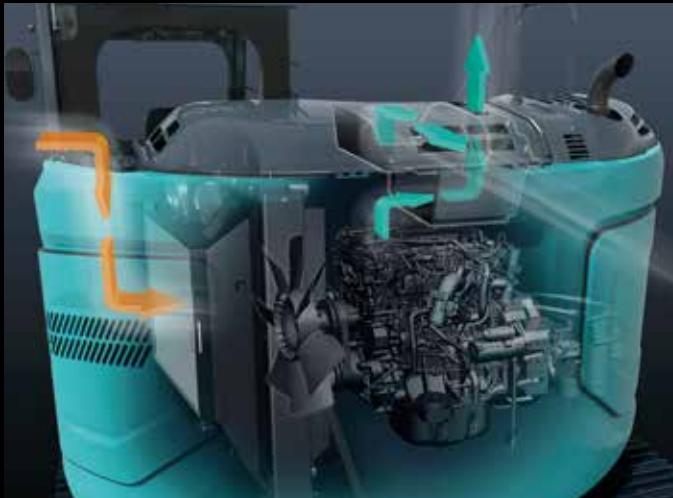NON-STOP OPERATION BY iNDr



How the filter catches dust

iNDr Filter

A high-density mesh filter blocks dust intruding during air intake. This prevents the cooling device and the air cleaner from clogging with dust and maintains their performances. The ridges of the corrugated filter allow the air to pass through, and the grooves collect the dust, which prevents the filter from clogging.

Total Support for Machines with Network Speed and Accuracy



KOMEXS is a telematics system for receiving machine information. Manage your machines anywhere in the world using the Internet. Location, workload and diagnostic data aid business operations.

Direct Access to Operational Status

Location Data

Accurate location data can be obtained even from sites where communications are difficult.

Fuel Consumption Data


Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.

Operating Hours

A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable. Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

Graph of Work Content

The graph shows how working hours are divided among different operating categories, including digging, idling, traveling, and optional operations (N&B).

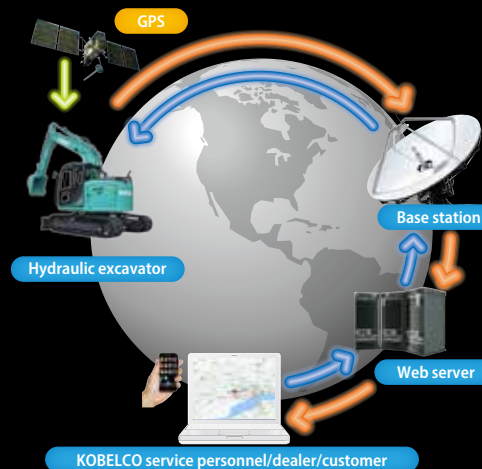

Maintenance Data and Warning Alerts

Machine Maintenance Data

Provides maintenance status of separate machines operating at multiple sites. Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.

Security System

Engine Start Alarm

Sends a notification if the engine is started outside of pre-defined hours.

Area Alarm

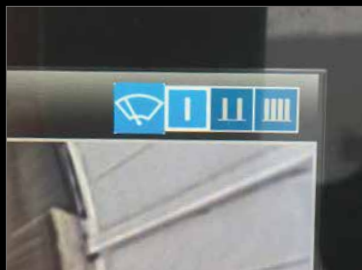
Sends a notification if the machine leaves a pre-defined area.

CONVENIENT AND SENSIBLE EQUIPMENT



Engine start password

A password is required when starting the engine for greater security. The initial password must be set at our workshop.



Wiper adjustment function

In addition to the intermittent wiper mode and continuous wiper mode, the one-time wiper mode was added.



Parallel wiper Sun screen



Console mount

The console-integrated seat allows for comfortable operation.



AM/FM Bluetooth® (hands-free) radio



USB port/12 V power outlet

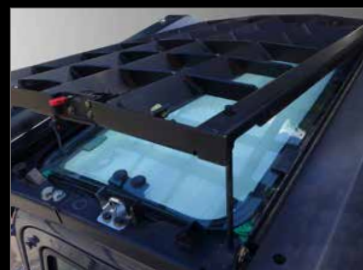


Smartphone holder

You can use the holder with your smartphone connected to the USB port.



Built-in rear camera/right camera



Openable FOPS guard

The openable guard allows for easy maintenance.



Urea tank

Urea filter cap is placed on the step for easy access.

Specifications



Engine

| Model | ISUZU MOTORS LIMITED 4JJ1XDDV A01 |
|--------------------|--|
| Type | Four-cycle, liquid-cooled, direct injection diesel, turbo charged complies with EU Stage V exhaust emission regulation |
| No. of cylinders | 4 |
| Bore and stroke | 95.4 mm x 104.9 mm |
| Displacement | 2.999 L |
| Rated power output | 78.6 kW/2,200 min ⁻¹ (ISO 9249: with fan) 86 kW/2,200 min ⁻¹ (ISO 14396: without fan) |
| Max. torque | 354 N·m/1,800 min ⁻¹ (ISO 9249: with fan) 375 N·m/1,800 min ⁻¹ (ISO 14396: without fan) |



Hydraulic system

| Pump | |
|----------------------|--|
| Type | Two variable displacement piston pumps + one gear pump |
| Max. discharge flow | 2 x 142 L/min 1 x 66 L/min |
| Relief valve setting | |
| Boom, arm and bucket | 34.3 MPa |
| Travel circuit | 34.3 MPa |
| Swing circuit | 28.0 MPa |
| Dozer circuit | 20.6 MPa |
| Control circuit | 5.0 MPa |
| Pilot control pump | Gear type |
| Main control valves | 12-spool |
| Oil cooler | Air cooled type |



Swing system

| Swing motor | One fixed displacement piston motor |
|----------------------------------|--|
| Brake | Hydraulic; locking automatically when the swing control lever is in the neutral position |
| Parking brake | Wet multiple plate |
| Swing speed | 11.0 min ⁻¹ |
| Tail swing radius | 1,490 mm |
| Swing torque | 40.4 kN·m |
| Maximum swing gradient (Loaded)* | 26% {15°} |

*Value for the least favourable specification



Attachments

Backhoe bucket and combination

| Use | | | Backhoe bucket | | | | | | |
|-----------------|---------------------|----------------|----------------|------|------|------|-------|-------|-------|
| | | | Normal digging | | | | | | |
| Bucket capacity | ISO heaped | m ³ | 0.24 | 0.31 | 0.38 | 0.45 | 0.50 | 0.57 | 0.70 |
| | Struck | m ³ | 0.20 | 0.23 | 0.28 | 0.35 | 0.38 | 0.43 | 0.52 |
| Opening width | With side cutter | mm | 590 | 700 | 800 | 915 | 1,000 | 1,100 | 1,275 |
| | Without side cutter | mm | 500 | 640 | 740 | 855 | 940 | 1,040 | 1,180 |
| No. of teeth | | | 3 | 3 | 4 | 4 | 5 | 5 | 5 |
| Bucket weight | | | 280 | 300 | 340 | 360 | 390 | 410 | 440 |
| Combination | 2.38 m arm | | ○ | ○ | ○ | ○ | ◎ | △ | △ |
| | 2.84 m arm | | ○ | ○ | ◎ | △ | × | × | × |

◎ Standard

○ Recommended

△ Loading only

× Not recommended



Travel system

| Travel motors | Variable displacement piston, two-speed motors |
|-----------------------|--|
| Travel brakes | Hydraulic brake |
| Parking brakes | Wet multiple plate |
| Travel shoes | 40 each side |
| Travel speed | 2.4/4.8 km/h |
| Drawbar pulling force | 195 kN (SAE) |
| Gradeability | 70% {35°} |



Cab & control

| Cab | |
|---|----------|
| All-weather, sound-suppressed steel cab mounted on the silicon-sealed viscous mounts and equipped with a heavy, insulated floor mat | |
| Control | |
| Two hand levers and two foot pedals for travel | |
| Two hand levers for excavating and swing | |
| Electric rotary-type engine throttle | |
| Noise levels | |
| External | 99 dB(A) |
| Operator | 74 dB(A) |



Boom, arm & bucket

| Boom cylinders | 100 mm x 1,092 mm |
|-----------------|-------------------|
| Arm cylinder | 115 mm x 1,116 mm |
| Bucket cylinder | 100 mm x 903 mm |



Dozer blade

| Dozer cylinder | 125 mm x 202 mm |
|------------------|------------------------------------|
| Dimensions | 3,260 mm (width) x 815 mm (height) |
| Working ranges | 790 mm (up) x 600 mm (down) |
| Max. tilt height | 445 mm |
| Angle | 25 degrees |



Refilling capacities & lubrications


| Fuel tank | 186 L |
|-----------------------|------------------------|
| Cooling system | 17 L |
| Engine oil | 17 L |
| Travel reduction gear | 2 x 5.0 L |
| Swing reduction gear | 1.65 L |
| Hydraulic oil tank | 89.9 L tank oil level |
| | 190 L hydraulic system |
| DEF/Urea tank | 26.0 L |



Working ranges

Unit: m

| Boom | | 4.68 m | |
|--|-----|--------|--------|
| Range | Arm | 2.38 m | 2.84 m |
| a- Max. digging reach | | 8.37 | 8.81 |
| b- Max. digging reach at ground level | | 8.17 | 8.62 |
| c- Max. digging depth | | 5.36 | 5.79 |
| d- Max. digging height | | 9.34 | 9.73 |
| e- Max. dumping clearance | | 6.91 | 7.30 |
| f- Min. dumping clearance | | 2.78 | 2.44 |
| g- Max. vertical wall digging depth | | 4.34 | 4.77 |
| h- Min. swing radius | | 2.13 | 2.52 |
| i- Horizontal digging stroke at ground level | | 4.22 | 4.71 |
| j- Digging depth for 2.4 m (8') at bottom | | 5.13 | 5.60 |
| Bucket capacity ISO heaped m ³ | | 0.50 | 0.38 |

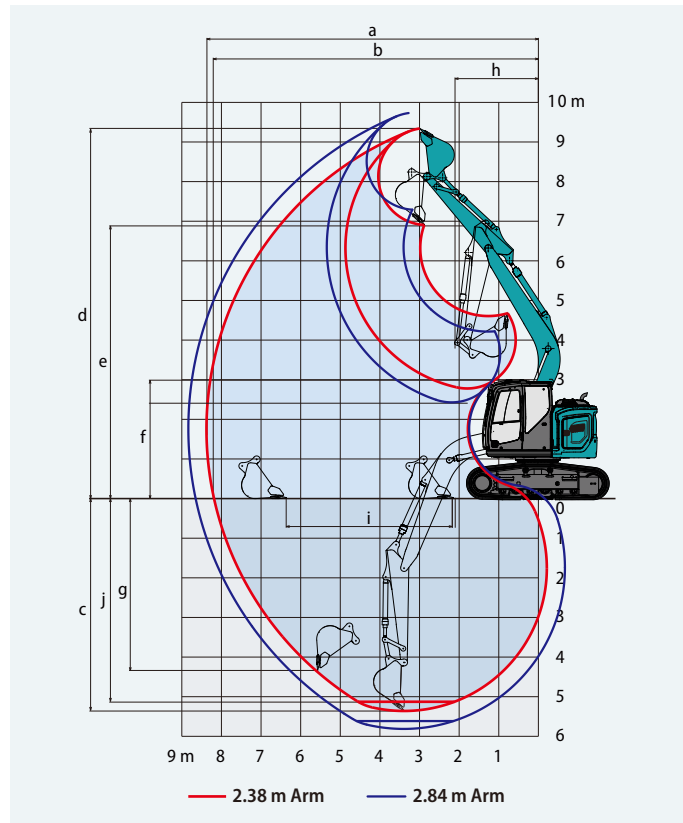

Digging force (ISO 6015)

Unit: kN

| Arm length | 2.38 m | 2.84 m |
|----------------------|--------|--------|
| Bucket digging force | 105.4 | |
| Arm crowding force | 64.0 | 58.0 |




Dimensions

Unit: mm

| Arm length | | 2.38 m | 2.84 m |
|------------|--|--------------------------|--------|
| A | Overall length | 8,550 | 8,640 |
| B | Overall height (to top of boom) | 2,820 | 3,180 |
| C | Overall width of crawler (600 mm shoe) | 2,590 | |
| D | Overall height (to top of cab) | 3,020 | |
| E | Ground clearance of rear end* | 1,030 | |
| F | Ground clearance* | 455 | |
| G | Tail swing radius {additional counterweight} | 1,490 {1,610**/1,670***} | |

| | | |
|----|--|--------------------------|
| G' | Distance from centre of swing to rear end {additional counterweight} | 1,490 {1,600**/1,670***} |
| H | Tumbler distance | 2,800 |
| I | Overall length of crawler | 3,600 |
| J | Track gauge | 1,990 |
| K | Shoe width | 600 |
| L | Overall width of upperstructure | 2,480 |
| M | Overall width (blade wings extended) | 3,260 |
| N | Folding blade width | 2,460 |

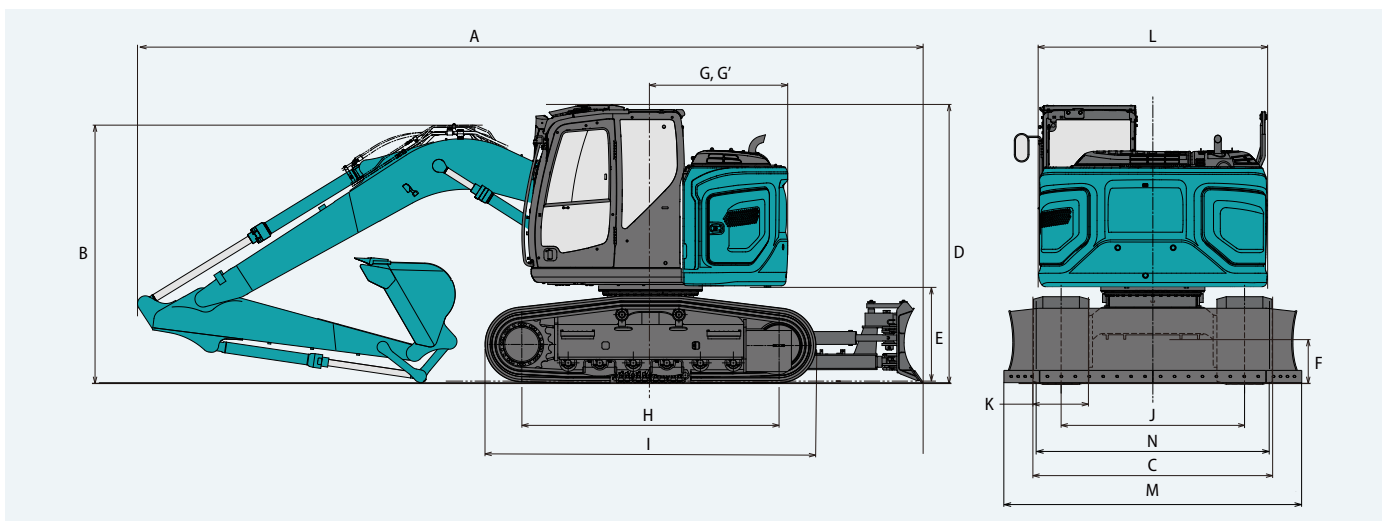*Without including height of shoe lug **580 kg counterweight ***1,000 kg counterweight




Operating weight & ground pressure

Boom: 4.68 m Arm: 2.38 m Bucket: 0.5 m³ ISO heaped bucket Dozer: with

| | Curved triple grouser shoes | | | | | |
|-----------------------|-----------------------------|--------|----------|--------|-----------|--------|
| Shoes (mm) | 500 | 600 | 500 | 600 | 500 | 600 |
| Counterweight | standard | | + 580 kg | | + 1000 kg | |
| Ground pressure (kPa) | 53.5 | 45.2 | 55.4 | 46.7 | 56.7 | 47.8 |
| Operating weight (kg) | 16,800 | 17,000 | 17,400 | 17,600 | 17,800 | 18,000 |

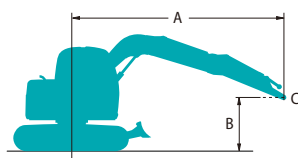Lift capacities



Rating over front













Rating over side or 360 degrees











A - Reach from swing centreline to arm top











B - Arm top height above/below ground

C - Lift point

Relief valve setting: 34.3 MPa

| ED160BR | | Arm: 2.38 m Counterweight: 1,720 kg Shoe: 600 mm Dozer: blade up | | | | | | | | | | |
|---------|---|---|---|---|---|---|---|---|---|---|--------|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | At max. reach | | Radius |
| |  |  |  |  |  |  |  |  |  |  | | |
| 7.5 m | kg | | | | | | | | | *2,180 | *2,180 | 4.06 m |
| 6.0 m | kg | | | | | *3,390 | *3,390 | | | *1,780 | *1,780 | 5.68 m |
| 4.5 m | kg | | | *4,470 | *4,470 | *3,730 | 3,640 | 2,760 | 2,280 | *1,660 | *1,660 | 6.57 m |
| 3.0 m | kg | | | *6,840 | 6,280 | 4,210 | 3,380 | 2,660 | 2,180 | *1,670 | *1,670 | 7.03 m |
| 1.5 m | kg | | | *5,040 | *5,040 | 3,910 | 3,110 | 2,530 | 2,070 | *1,780 | 1,590 | 7.13 m |
| G.L. | kg | | | *6,320 | 5,350 | 3,730 | 2,950 | 2,440 | 1,980 | 2,000 | 1,640 | 6.90 m |
| −1.5 m | kg | *5,680 | *5,680 | 7,390 | 5,380 | 3,690 | 2,910 | 2,430 | 1,970 | 2,270 | 1,850 | 6.30 m |
| −3.0 m | kg | *9,370 | *9,370 | *6,180 | 5,540 | 3,780 | 2,990 | | | 3,070 | 2,470 | 5.20 m |

| ED160BR | | Arm: 2.38 m Counterweight: 1,720 + 580 kg Shoe: 600 mm Dozer: blade up | | | | | | | | | | |
|---------|----|---|---|---|---|---|---|---|---|---|---|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  | |
| 7.5 m | kg | | | | | | | | | *2,180 | *2,180 | 4.06 m |
| 6.0 m | kg | | | | | *3,390 | *3,390 | | | *1,780 | *1,780 | 5.68 m |
| 4.5 m | kg | | | *4,470 | *4,470 | *3,730 | *3,730 | 3,030 | 2,500 | *1,660 | *1,660 | 6.57 m |
| 3.0 m | kg | | | *6,840 | *6,840 | *4,520 | 3,710 | 2,930 | 2,410 | *1,670 | *1,670 | 7.03 m |
| 1.5 m | kg | | | *5,040 | *5,040 | 4,230 | 3,440 | 2,810 | 2,290 | *1,780 | *1,780 | 7.13 m |
| G.L. | kg | | | *6,320 | 5,940 | 4,140 | 3,280 | 2,720 | 2,210 | *2,010 | 1,830 | 6.90 m |
| −1.5 m | kg | *5,680 | *5,680 | *7,910 | 5,970 | 4,090 | 3,240 | 2,700 | 2,200 | *2,510 | 2,070 | 6.30 m |
| −3.0 m | kg | *9,370 | *9,370 | *6,180 | 6,130 | 4,190 | 3,320 | | | *3,340 | 2,750 | 5.20 m |

| ED160BR | | Arm: 2.38 m Counterweight: 1,720 + 1,000 kg Shoe: 600 mm Dozer: blade up | | | | | | | | | | |
|---------|----|---|---|---|---|---|---|---|---|---|---|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  | |
| 7.5 m | kg | | | | | | | | | *2,180 | *2,180 | 4.06 m |
| 6.0 m | kg | | | | | *3,390 | *3,390 | | | *1,780 | *1,780 | 5.68 m |
| 4.5 m | kg | | | *4,470 | *4,470 | *3,730 | *3,730 | 3,230 | 2,670 | *1,660 | *1,660 | 6.57 m |
| 3.0 m | kg | | | *6,840 | *6,840 | *4,520 | 3,950 | 3,130 | 2,580 | *1,670 | *1,670 | 7.03 m |
| 1.5 m | kg | | | *5,040 | *5,040 | 4,610 | 3,680 | 3,010 | 2,460 | *1,780 | *1,780 | 7.13 m |
| G.L. | kg | | | *6,320 | *6,320 | 4,430 | 3,520 | 2,920 | 2,380 | *2,010 | 1,970 | 6.90 m |
| −1.5 m | kg | *5,680 | *5,680 | *7,910 | 6,390 | 4,390 | 3,480 | 2,900 | 2,370 | *2,510 | 2,220 | 6.30 m |
| −3.0 m | kg | *9,370 | *9,370 | *6,180 | *6,180 | *4,250 | 3,560 | | | *3,340 | 2,940 | 5.20 m |

Note:

- Do not attempt to lift or hold any load that is greater than these lifting capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lifting capacities.
- Lifting capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Arm top defined as lift point.
- The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lift capacities marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
- Lifting capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

STANDARD EQUIPMENT

ENGINE

- ISUZU MOTORS LIMITED 4JJ1XDDV A01, diesel engine with turbocharger and intercooler, EU Stage V compliant
- Auto Idle Stop
- Automatic engine deceleration
- Batteries (2 x 12 V - 100 Ah)
- Starting motor (24 V - 4 kW), 50 amp alternator
- Engine oil pan drain cock
- Double element air cleaner
- Refueling pump

CONTROL

- Working mode selector (H-mode, S-mode and ECO-mode)
- Rotating & N&B piping (proportional hand controlled)
- Bucket link with lifting hook (Boom and arm safety valves and overload alarm)

SWING SYSTEM & TRAVEL SYSTEM

- Swing rebound prevention system
- Straight propel system
- Two-speed travel with automatic shift down
- Sealed & lubricated track links
- 600 mm curved shoe
- Grease-type track adjusters
- Automatic swing brake
- Tilt angle dozer blade
- Lower frame guard
- Rock guard for arm

MIRRORS, LIGHTS and CAMERAS

- Rear view mirror, rear view camera, left side view camera and right side view camera
- Eagle eye view
- LED work lights : 2 on boom, 1 on upper frame, 2 on rear counterweight

CAB & CONTROL

- Two control levers, pilot-operated
- Horn, electric
- Integrated left-right slide-type control box
- LED door light (interior)
- Coat hook
- Large cup holder
- Detachable two-piece floor mat
- GRAMMER* air suspension seat with heater
- Retractable seatbelt
- Headrest
- Handrails
- Intermittent parallel wiper with double-spray washer
- Skylight
- Openable top guard (ISO 10262: 1998)
- Tinted safety glass
- Pull-type front window and removable lower front window
- Easy-to-read 10-inch LCD SCREEN multi-display monitor
- DAB+ radio (FM/AM & AUX & USB & Bluetooth® & hands free telephone)
- 12 V converter
- Hands-free telephone
- USB port
- Air conditioning system
The air conditioning system on this machine contains fluorinated greenhouse gas HFC-134a (GWP 1430).
Quantity of gas 0.8 kg (CO₂ equivalent 1.2 t)
- Sun screen
- Large footrest

SAFETY

- Emergency escape hammer

OPTIONAL EQUIPMENT

- Various optional arms
- Wide range of shoes
- Front-guard protective structure (may interfere with bucket action)
- Cab top work LED lights (two lights)

- Rain visor (may interfere with bucket action)
- Quick hitch piping
- Travel alarm
- Add-on counterweight (+ 580/1,000 kg)

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.

Bluetooth® is a registered trademark of the Bluetooth SIG Inc.

*GRAMMER is trademark of GRAMMER AG, registered in Germany and other countries.

Note: This catalogue may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice.
Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalogue may be reproduced in any manner without notice.

KOBELCO CONSTRUCTION MACHINERY EUROPE B.V.
www.kobelco-europe.com



Enquiries To: