

# KOBELCO

SK500XDLC/SK520XDLC

## SK500XD<sub>LC</sub> SK520XD<sub>LC</sub>

■ Bucket Capacity :

2.1 – 3.4 m<sup>3</sup> (ISO heaped)

■ Engine Power :

257 kW/1,850 min<sup>-1</sup> (ISO 14396)

■ Operating Weight :

51,200 – 52,700 kg



*Built for Perfectionists™*



# Power Meets Efficiency



In line with KOBELCO's concept of mining-friendly construction machinery that will work long and hard on any site on the planet, the rugged machine body is newly designed, and comprehensive reinforcement makes the attachment more robust. It all adds up to KOBELCO's toughest ever mining excavator.


The latest hydraulics technology delivers both high-powered output and lower fuel consumption.

As the 10th generation model of KOBELCO's SK series, the SK500XDLC/SK520XDLC meets the needs of the most punishing mining sites with a performance that simply astounds.



\*TOP Guard is fitted as optional.



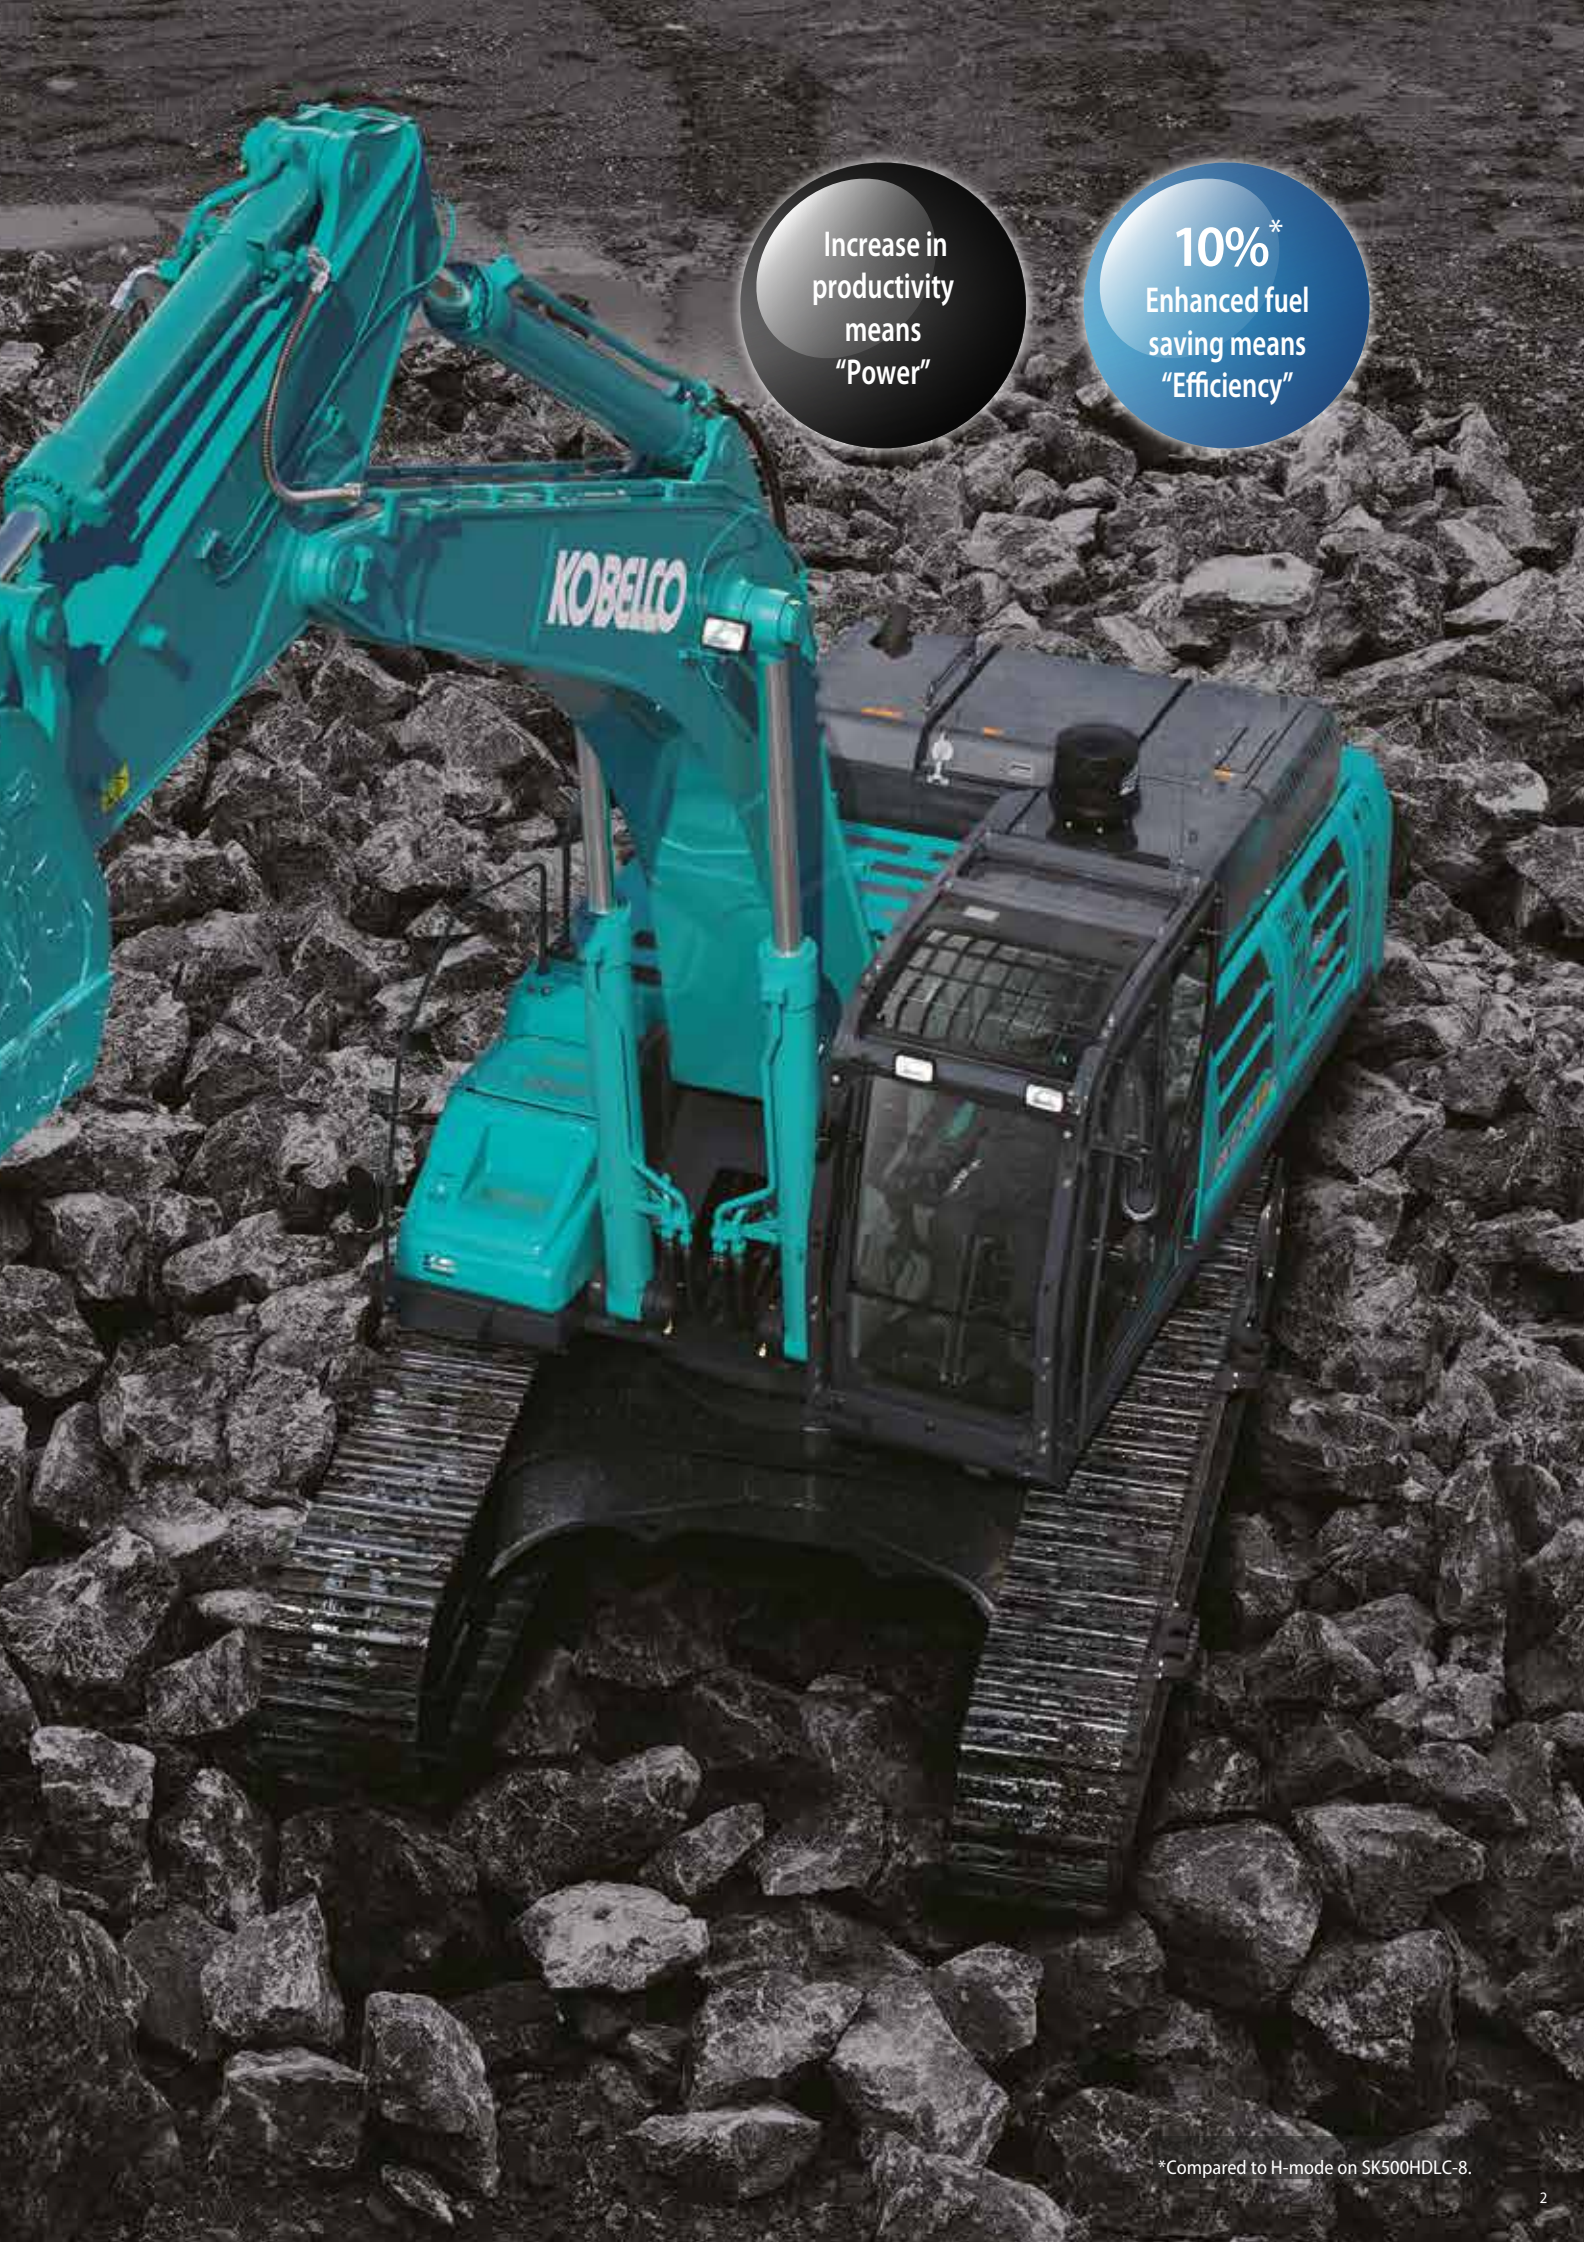

Increase in  
productivity  
means  
"Power"

**10%\***  
Enhanced fuel  
saving means  
"Efficiency"

\*Compared to H-mode on SK500HDL-8.




# Even Stronger Attachment & Component

Built to Operate in Tough Working Environment

## Hydraulic Drive for Engine Cooling Fan; NEW Independent Oil Cooler Fan

Hydraulic drive optimizes the cooling fan rotation speed to improve fuel economy and reduce noise. Also, the independent oil cooler fan better matches cooling to the hydraulic oil temperature, for optimal oil temperature control.



Cooling fan for intercooler & radiator




Cooling fan for oil cooler



## Upper Under Covers

Thick covers with increased durability compared to SK500HDL-8.



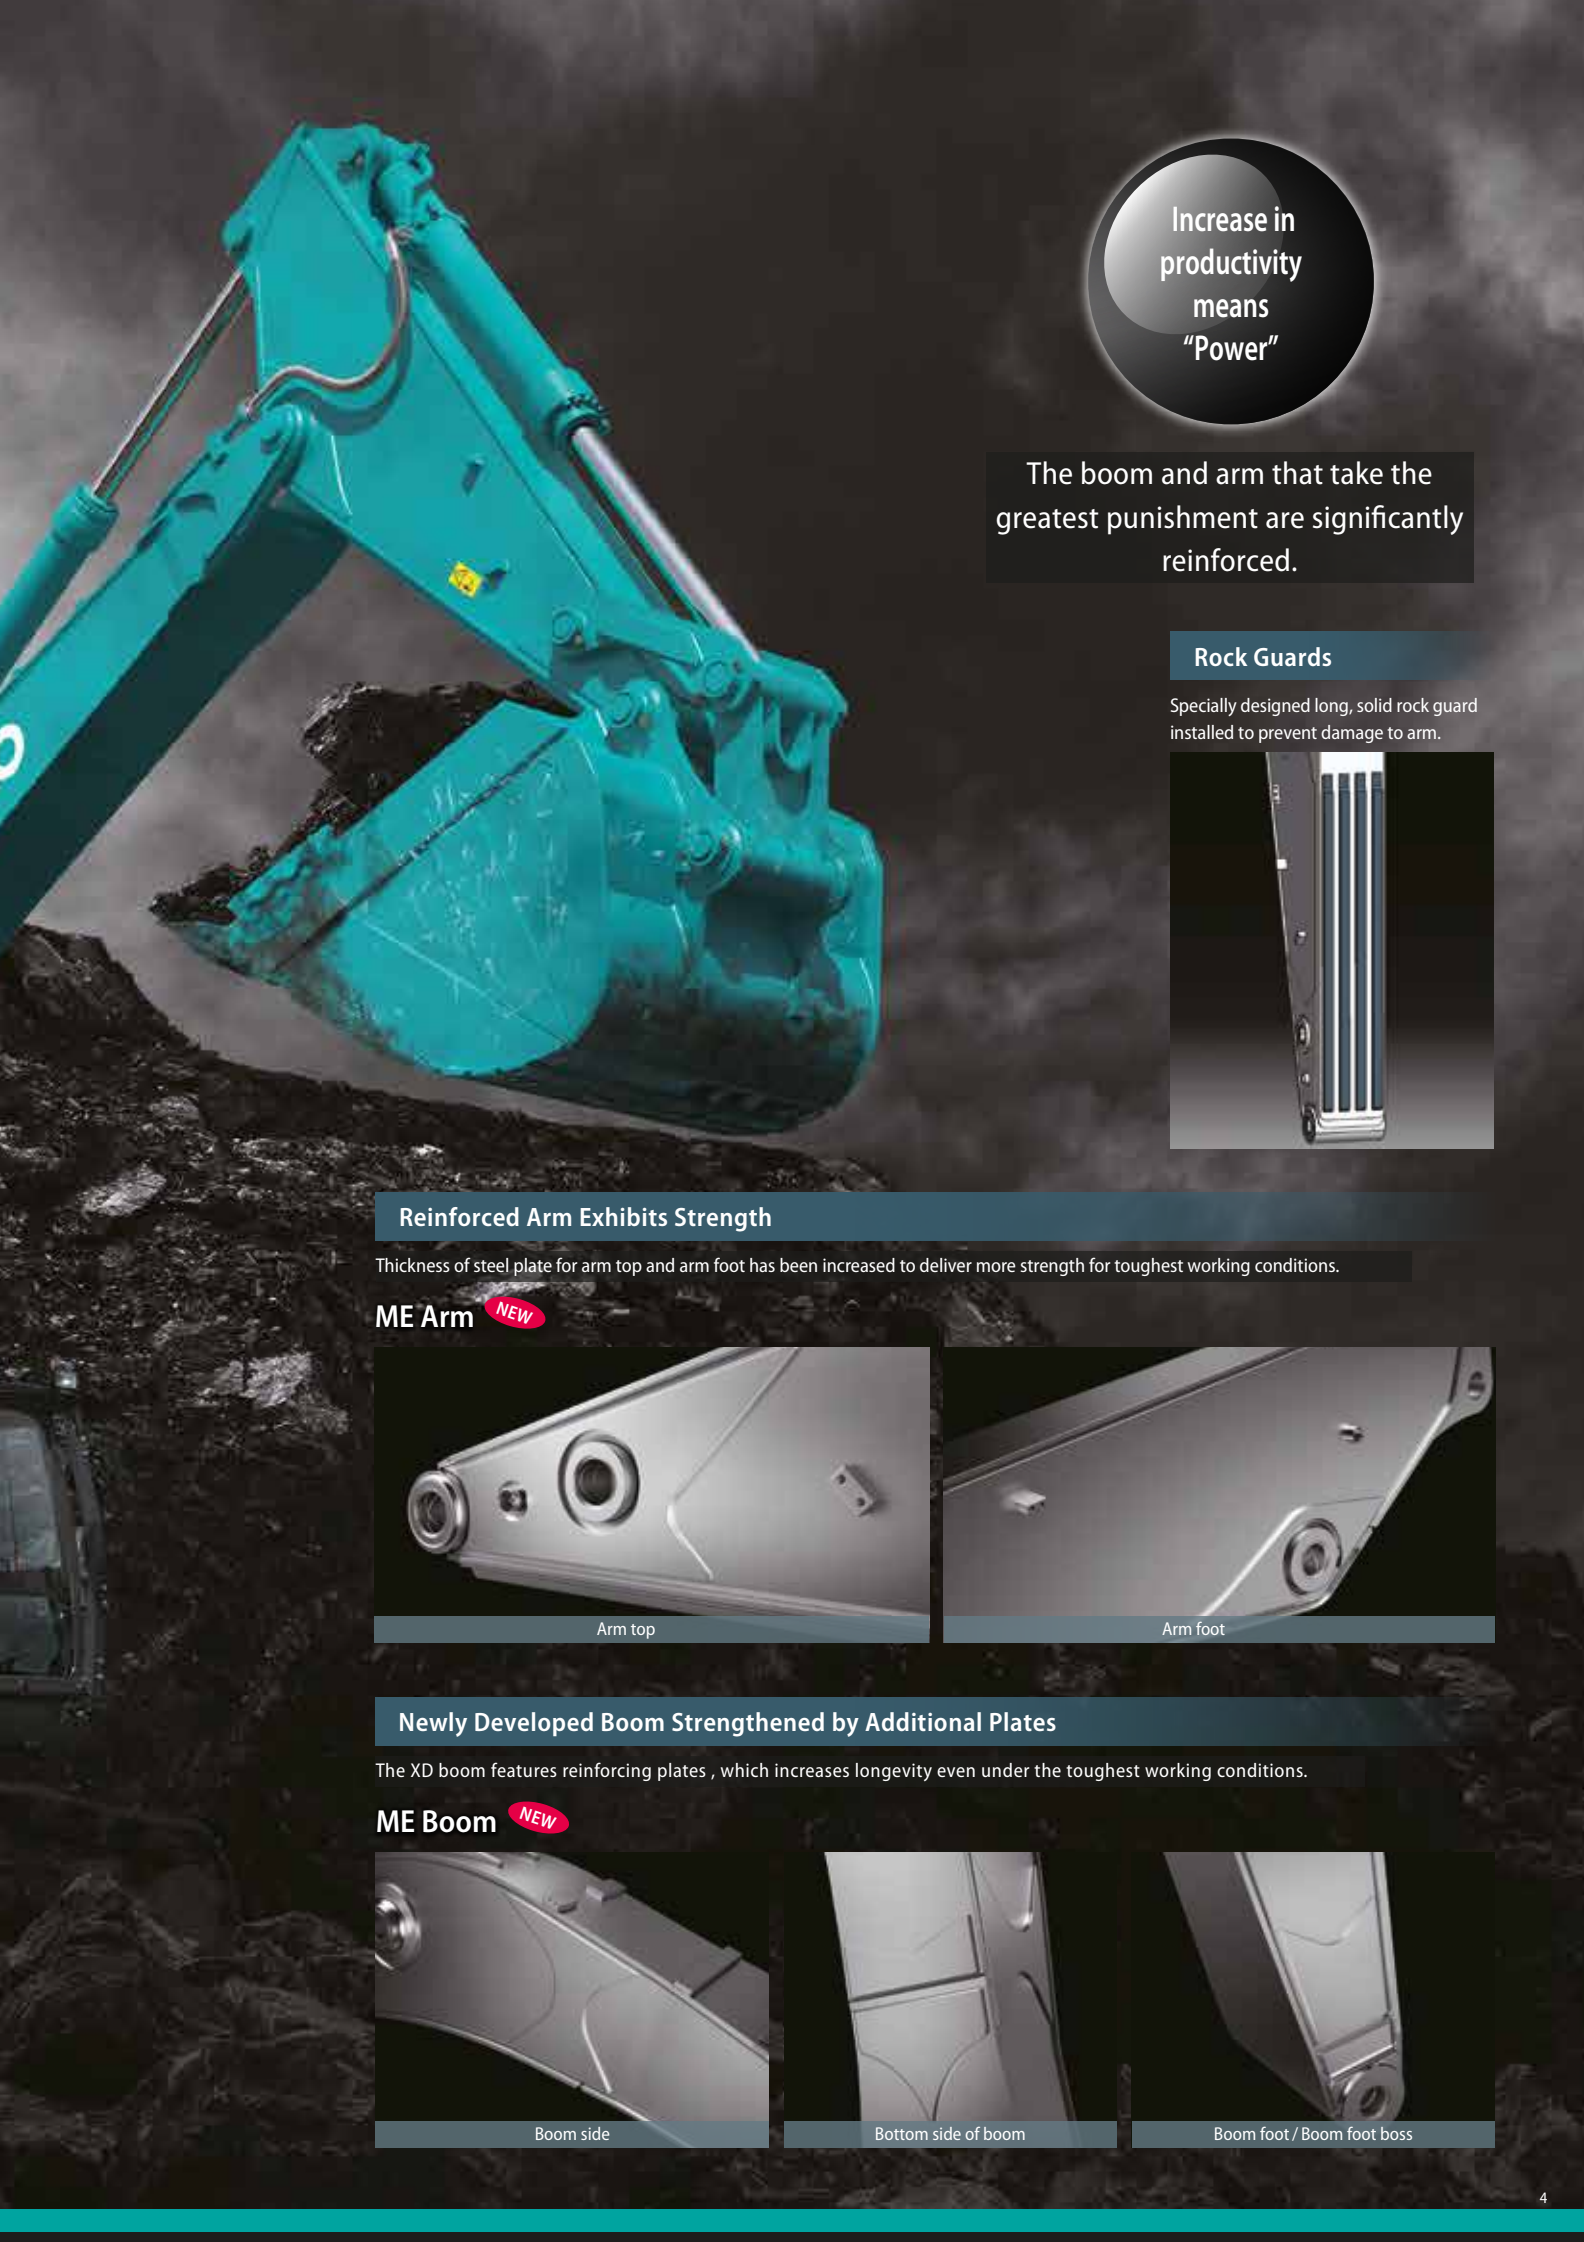

The boom and arm that take the greatest punishment are significantly reinforced.

**Rock Guards**

Specially designed long, solid rock guard installed to prevent damage to arm.



**Reinforced Arm Exhibits Strength**

Thickness of steel plate for arm top and arm foot has been increased to deliver more strength for toughest working conditions.

**ME Arm** NEW



Arm top




Arm foot

**Newly Developed Boom Strengthened by Additional Plates**

The XD boom features reinforcing plates , which increases longevity even under the toughest working conditions.

**ME Boom** NEW

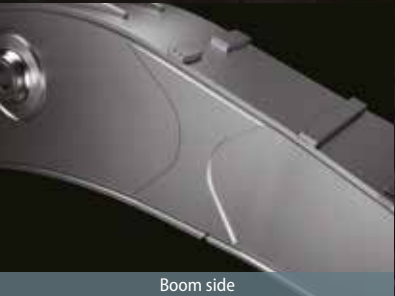

Boom side



Bottom side of boom



Boom foot / Boom foot boss



# Increase in Productivity Means “Power”

Powerful travel system for easy transit over loose stones, and highly reliable filtration system ensure higher machine performance.

## Crawlers Built for Unbeatable Durability

### Reinforced Guide Frame ❶



Reinforced guide frame prevents deformation caused by impact or encroaching of loose stones.

### Reinforced Guide Frame ❷



Inside of guide frame is reinforced.

### Track Guides



Large, reinforced track guides are installed in four locations.

### Double-Support Outer Flange Upper Rollers



Double-support outer flanged upper rollers can withstand powerful vibrations.

### Thicker Steel Plate for Shoes



Reinforced HD shoes of thick steel plate to master rough, stony ground.

### Track Links



The durability of the track link is increased compared to SK500HDLC-8.

### Lower Frame Guard



Hydraulic piping and equipment protected against damage from rubble and stony ground.




## Improved Filtration System Reliability

Clean, contaminant-free fuel and hydraulic fluid are essential to stable performance.

The improved filtration systems reduce the risk of mechanical trouble and enhance longevity and durability.


### Fuel Filter NEW

The pre-filter, with built-in water separator maximizes filtering performance.

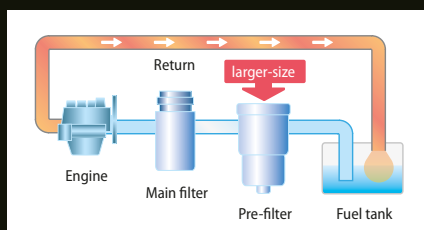

### Hydraulic Fluid Filter NEW

Recognized as the best in the industry, our Premium-fine filter separates out even the smallest particles. New cover prevents contamination when changing filters.

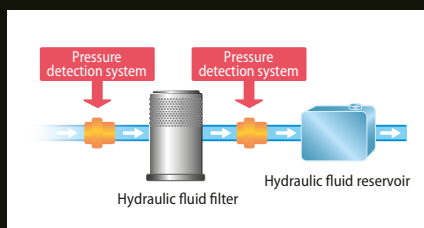


### Hydraulic Fluid Filter Clog Detector NEW

Hydraulic tank pressure sensor monitors the pressure difference between the return line and tank inside pressure to determine the degree of clogging. If the difference exceeds a predetermined level, a warning appears on the multi-display, so any contamination can be trapped by the filter and replaced before it reaches the hydraulic fluid in the tank.

### Metal Mesh Cover Air Cleaner NEW

Metal mesh cover ensures strength and durability.



Enlarged filter image



# Evolution Continues, with Improved Fuel Efficiency

10%\*  
Enhanced fuel  
saving means  
"Efficiency"

The new arm interflow system more efficiently controls hydraulic fluid flow, and significant reduction of in-line resistance and pressure loss. This improves fuel efficiency.

\*Compared to H-mode on SK500HDL-8.




## Hydraulic System: Revolutionary Technology Saves Fuel

### Arm Interflow System

NEW

When lowering the boom, this system uses the downward force generated by the boom's weight to push fluid to the shovel arm. This greatly reduces the need to apply power from outside the system.

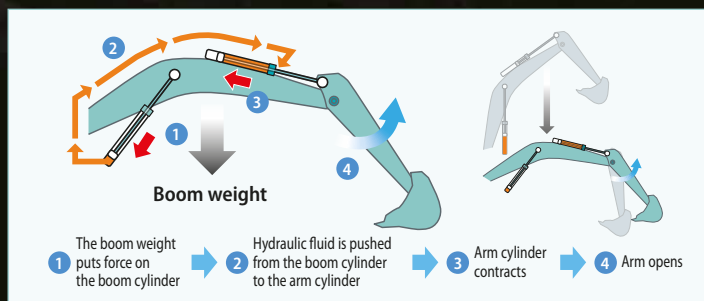

## Energy Saving System Saves Fuel Further

### Fuel Efficient Work Mode ECO-Mode

NEW

The fuel-saving ECO-mode is newly provided to the operation mode, selectable according to a desired operation. Fuel consumption can be greatly reduced.



- E** Minimum fuel consumption for utility projects and other work that demands precision  
ECO-mode, 21% decrease
- H** Used to prioritize the amount of work done  
H-mode, 10% decrease
- S** Used to strike a balance between workloads and fuel efficiency  
S-mode, 10% decrease





## Get More Output Faster with Superior Operability

### ME 2.6 m Arm


■ Max. Bucket Digging Force		■ Max. Digging Reach:
Normal:	<b>282 kN</b>	<b>11,250 mm</b>
With Power Boost:	<b>308 kN</b>	■ Max. Digging Depth:
		<b>6,820 mm</b>
■ Max. Arm Digging Force		■ Max. Vertical Digging Depth:
Normal:	<b>239 kN</b>	<b>6,090 mm</b>
With Power Boost:	<b>261 kN</b>	

### Short 3.0 m Arm

■ Max. Bucket Digging Force		■ Max. Digging Reach:
Normal:	<b>267 kN</b>	<b>11,690 mm</b>
With Power Boost:	<b>292 kN</b>	■ Max. Digging Depth:
		<b>7,360 mm</b>
■ Max. Arm Digging Force		■ Max. Vertical Digging Depth:
Normal:	<b>223 kN</b>	<b>6,580 mm</b>
With Power Boost:	<b>244 kN</b>	

Equipped with a 3.1 m³ ME bucket, the maximum digging reach stretches 370 mm further than the SK500HDL-8, resulting in a reach of over 11 m.

**NEW**

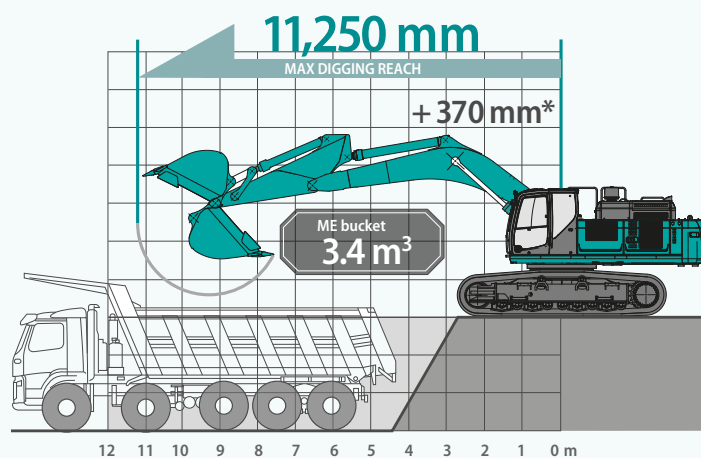

\*Compared to SK500HDL-8.

## Top Class Traveling Force

Powerful traveling force and drawbar pulling force deliver plenty of speed when climbing slopes or negotiating bad roads, and the agility to change direction swiftly and smoothly.

■ Drawbar Pulling Force: **415 kN**



# Comfortable Cab Is Now Safer than Ever

A work environment that is quieter and more comfortable. A cab that puts the operator first is key to improved safety.


## Large Cab

NEW

4% larger than the previous cab capacity. Relaxing environment allows work to be performed in comfort.

## Air Conditioner Louvers behind the Seat

NEW



The large air-conditioner has louvers on the back pillars that blow from behind and to the right and left of the operator's seat. They can be adjusted to put a direct flow of cool/warm air on the operator, which means a more comfortable operating environment.

## Super-Airtight Cab

NEW




The high level of air-tightness keeps dust out of the cab.

## Low Vibration

NEW

Coil springs absorb small vibrations, and high suspension mounts filled with silicone oil reduce heavy vibration. The long stroke achieved by this system provides excellent protection from vibration.


Twice the stroke of a conventional mount



## Multi-Display in Color

NEW

Brilliant colors and graphic displays are easy to recognize on the LCD multi-display in the console. The display shows fuel consumption, maintenance intervals, and more.



Fuel consumption

MAINTENANCE			
	INTERVAL	REMAINING TIME	EXCHANGE DAY
ENGINE OIL	250	245	---
FUEL FILTER	500	495	---
HYD. FILTER	1000	995	---

Maintenance



Breaker mode

- 1 Analog gauge provides an intuitive reading of fuel level and engine water temperature
- 2 Green indicator light shows low fuel consumption during operation

- 3 Fuel consumption/Switch indicator for rear camera images
- 4 Digging mode switch
- 5 Monitor display switch

## One-Touch Attachment Mode Switch

A simple touch of a button, switches the hydraulic circuit and flow amount to match attachment changes. Icons help the operator to confirm the proper configuration at a glance.



## Comfort



### Broad View <sup>NEW</sup> Helps the Operator

The front window features one large piece of glass without a center pillar on the right side for a wide, unobstructed view.

### Large Cab Is Easy <sup>NEW</sup> to Get In and Out of

The expanded cab provides plenty of room for a large door, more headroom and smoother entry and exit.



## More Comfortable Seat Means Higher Productivity



Vibration absorbing suspension seat



Seat recliner can be pushed back flat



Double slides allow adjustment for optimum comfort

## A Light Touch on the Lever Means Smoother, Less Tiring Work <sup>NEW</sup>



38%  
Less

It takes 38% less effort to work the operation lever, which reduces fatigue over long working hours or continued operations.

## Interior Equipment Adds to Comfort and Convenience



12 V outlet



Large cup holder

## Safety

### ROPS Cab



ROPS (Roll-Over-Protective Structure)-compliant cab clears ISO standards (ISO-12117-2: 2008) and ensures greater safety for the operator should the machine tip over.



### Wide View During Operations <sup>NEW</sup> High Visibility for Safety



Greater safety assured by rearview mirrors on left and right.



Hammer for emergency exit

### Rear View Camera <sup>NEW</sup> (optional)



A rear view camera is installed as option to simplify checking for safety behind the machine. The picture appears on the color monitor.



# Efficient Maintenance Keeps the Machine in Peak Operating Condition



Examples of displaying maintenance information

## Machine Information Display Function

- Displays only the maintenance information that's needed, when it's needed
- Self-diagnostic function provides early-warning detection and display of electrical system malfunctions
- Service-diagnostic function makes it easier to check the status of the machine
- Record function of previous breakdowns including irregular and transient malfunction

## Easy, On-the-Spot Maintenance NEW

There is ample space in the engine compartment for a mechanic to do maintenance work inside. The distance between steps is lower so entry and exit is easier. And the mechanic can work in comfort, without contortions or unnatural body positions. Finally, the hood is lighter and easier to raise and lower.



Step/Hand rail

## Maintenance Work, Daily Checks, Etc., Can Be Done from Ground Level


The layout allows for easy access from the ground for many daily checks and regular maintenance tasks.




Fuel filter with built-in water separator / Engine oil filter



Battery shut off switch



Left side



Right side

Simple layout for easy access to radiator and cooling system elements.

- ① Engine oil filter
- ② Pilot filter
- ③ Pump drain filter
- ④ Fuel filter with built-in water separator

## Easy Cleaning



Crawler frame

Special crawler frame design for easy mud removal cleaning.




Detachable two-piece floor mat

Detachable two-piece floor mat with handles for easy removal. A floor drain is located under floor mat.



Floor mat with raised edges

Floor mat's raised edges help keep the cab floor free of mud, simplify cleaning.



Engine oil pan

Engine oil pan equipped with drain valve.



Double-element air cleaner

## More Efficient Maintenance inside the Cab

Internal and external air conditioner filters can be easily removed without tools for cleaning.



Air conditioner filters



# Specifications



## Engine

Model	HINO P11C-WF
Type	Water-cooled, 4-cycle 6-cylinder direct injection type diesel engine with intercooler turbo-charger
No. of cylinders	6
Bore and stroke	122 mm × 150 mm
Displacement	10.52 L
Rated power output	257 kW / 1,850 min <sup>-1</sup> (ISO 14396)
Max. torque	1,400 N·m / 1,400 min <sup>-1</sup> (ISO 14396)



## Hydraulic System

Pump	
Type	Two variable displacement pumps + One gear pump
Max. discharge flow	2 × 370 L / min
Relief valve setting	
Excavating circuits (main)	31.4 MPa
Power Boost	34.3 MPa
Travel circuit	34.3 MPa
Swing circuit	26.0 MPa
Pilot control circuit	5.0 MPa
Pilot control pump	Gear type
Main control valve	8-spool
Oil cooler	Air cooled type



## Swing System

Swing motor	Axial piston motor
Brake	Hydraulic; locking automatically when the swing control lever is in neutral position
Parking brake	Wet multiple plate, hydraulic operated automatically
Swing speed	7.6 min <sup>-1</sup>



## Attachments

Backhoe bucket and combination

Use		Backhoe bucket			
		General digging	Heavy digging	Mass Excavating	
Bucket capacity	ISO heaped m <sup>3</sup>	2.1	2.5	3.1	3.4
Opening width	With side cutters mm	1,570	1,820	1,760	1,900
	Without side cutters mm	1,470	1,700	1,670	1,810
No. of teeth		5	5	5	6
Bucket weight	kg	2,470	2,850	2,320	2,410
Combination	ME 6.5 m boom and ME 2.6 m arm	—	—	○	○
	Short arm 3.0 m with 9,800 kg counterweight	○	—	—	—
	Short arm 3.0 m with 11,200 kg counterweight	○	○	—	—

○ Recommended — Not applicable



## Travel System

Travel motors	Variable displacement piston pump
Travel brakes	Hydraulic
Parking brakes	Wet multiple plate
Travel shoes	50 each side
Travel speed (high/low)	5.4 / 3.4 km/h
Drawbar pulling force	415 kN
Gradeability	70% (35 deg)



## Cab & Control

### Cab

International Comfort Cab with dust free enclosure and with internal pressure of 97 Pa (earlier cab 27 Pa). All-weather, sound-suppressed steel cab mounted on the high suspension mounts filled with silicone oil and equipped with a heavy, insulated floor mat.

### Control

Two hand levers and two foot pedals for travel

Two hand levers for excavating and swing

Electric rotary-type engine throttle



## Boom, Arm & Bucket

Boom cylinders		170 mm × 1,590 mm
Arm cylinder		190 mm × 1,970 mm
Bucket cylinder	ME 2.6 m arm	170 mm × 1,429 mm
	Short 3.0 m arm	160 mm × 1,410 mm



## Refilling Capacities & Lubrications

Fuel tank	638 L
Cooling system	47.4 L
Engine oil	42.5 L
Travel reduction gear	2 × 15 L
Swing reduction gear	2 × 5 L
Hydraulic oil tank	371 L tank oil level
	631 L hydraulic system



# Specifications




## Working Ranges

		Unit: m	
Boom	Arm	ME 6.5 m ME 2.6 Arm	7.0 m Short 3.0 Arm
Range			
a- Max. digging reach		11.25	11.69
b- Max. digging reach at ground level		11.01	11.45
c- Max. digging depth		6.82	7.36
d- Max. digging height		11.12	10.85
e- Max. dumping clearance		7.18	7.49
f- Min. dumping clearance		3.07	3.23
g- Max. vertical wall digging depth		6.09	6.58
h- Min. swing radius		4.96	5.31
i- Horizontal digging stroke at ground level		3.87	5.12
j- Digging depth for 2.4 m (8') flat bottom		6.66	7.20
Bucket capacity ISO heaped m <sup>3</sup>		3.40	2.10

## Digging Force (ISO 6015)

		Unit: kN	
Arm length		ME 2.6 Arm	Short 3.0 Arm
Bucket digging force		282/308*	267/292*
Arm crowding force		239/261*	223/244*

\*Power Boost engaged.

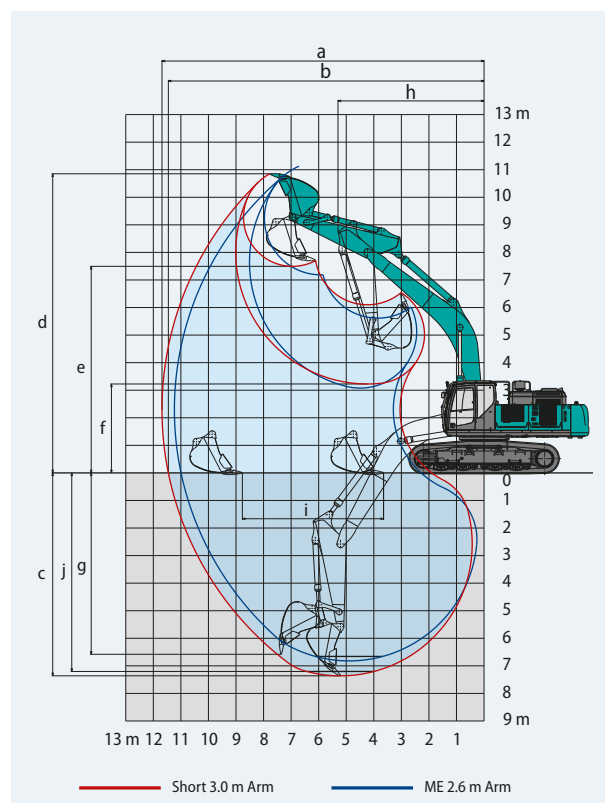


## Dimensions

Arm length		ME 2.6 Arm	Short 3.0 Arm
A	Overall length	12,060	12,210
B	Overall height (to top of boom)	4,330	3,780
C	Overall width	3,580	
D	Overall height (to top of cab)	3,380	
E	Ground clearance of rear end*	1,260*	
F	Ground clearance*	510*	

Unit: mm			
G	Tail swing radius	SK500XDLC	3,800
		SK520XDLC	3,880
G'	Distance from center of swing to rear end	SK500XDLC	3,800
		SK520XDLC	3,880
H	Tumbler distance		
I	Overall length of crawler		
J	Track gauge		
K	Shoe width		
L	Overall width of upperstructure		

\*Without including height of shoe lug.

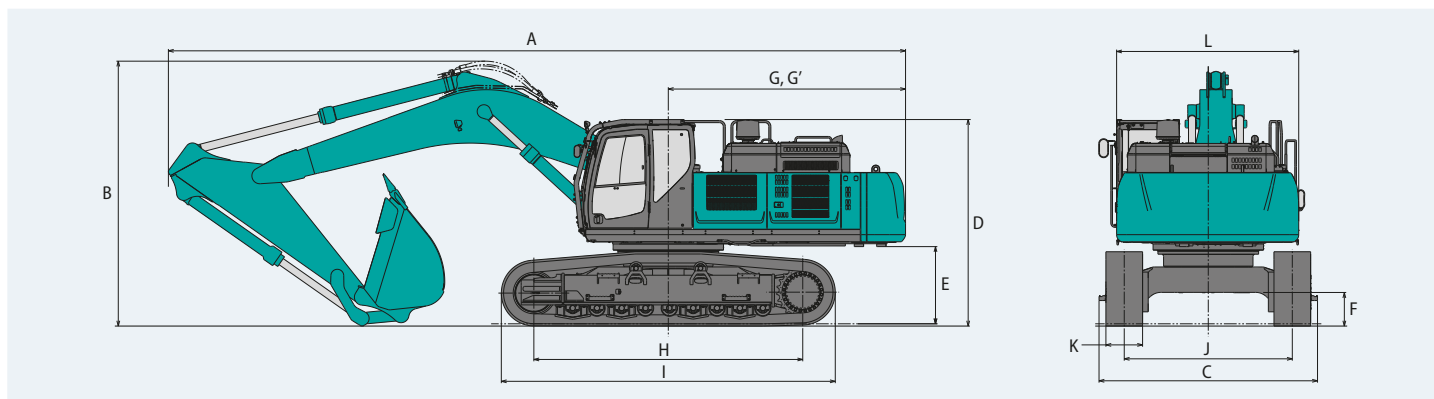

## Operating Weight & Ground Pressure

In standard trim, with ME 6.5 m boom, ME 2.6 m arm, 3.4 m<sup>3</sup> ISO heaped bucket, and 11,200 kg counterweight

Shaped		Triple grouser shoes (even height)	
Shoe width	mm	600	
Overall width of crawler	mm	3,350	
Ground pressure	kPa	90	
Operating weight	kg	52,700	

In standard trim, with 7.0 m boom, 3.0 m arm, 2.1 m<sup>3</sup> ISO heaped bucket, and 9,800 kg counterweight


Shaped		Triple grouser shoes (even height)	
Shoe width	mm	600	
Overall width of crawler	mm	3,350	
Ground pressure	kPa	88	
Operating weight	kg	51,200	



# Lift Capacities

**SK500XD<sub>LC</sub>**  
SK500XDLC-10

**SK520XD<sub>LC</sub>**  
SK520XDLC-10



Rating over front















Rating over side or 360 degrees













A: Reach from swing centerline to arm top

B: Arm top height above/below ground

C: Lift point

Relief valve setting: 31.4 MPa

SK500XDLC		Boom: 7.0 m		Arm: 3.0 m		Bucket: without		Counterweight: 9,800 kg		Shoe: 600 mm HD				
B	A	3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius
														
9.0 m												*9,660	*9,660	7.25 m
7.5 m	kg							*9,450	*9,450			*9,000	*9,000	8.41 m
6.0 m	kg							*9,900	*9,900	*9,400	8,360	*8,770	8,050	9.18 m
4.5 m	kg			*17,250	*17,250	*12,830	*12,830	*10,770	*10,770	*9,690	8,170	*8,810	7,270	9.65 m
3.0 m	kg					*14,720	14,020	*11,780	10,280	*10,190	7,900	*9,100	6,850	9.88 m
1.5 m	kg					*16,150	13,300	*12,660	9,850	*10,660	7,660	*9,660	6,730	9.86 m
G.L.	kg			*16,970	*16,970	*16,830	12,930	*13,190	9,570	*10,910	7,520	*10,140	6,900	9.62 m
-1.5 m	kg	*13,370	*13,370	*22,030	19,750	*16,710	12,850	*13,180	9,480	*10,620	7,520	*10,410	7,410	9.11 m
-3.0 m	kg	*23,860	*23,860	*20,270	20,070	*15,710	13,000	*12,350	9,610			*10,620	8,490	8.31 m
-4.5 m	kg	*21,890	*21,890	*17,130	*17,130	*13,320	*13,320					*10,520	*10,520	7.10 m

SK520XDLC		Boom: ME 6.5 m    Arm: ME 2.6 m    Bucket: without    Counterweight: 11,200 kg    Shoe: 600 mm HD												
A  B		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius
														
9.0 m												*11,140	*11,140	6.24 m
7.5 m	kg							*10,760	*10,760			*9,660	*9,660	7.56 m
6.0 m	kg					*11,590	*11,590	*10,570	*10,570			*8,980	*8,980	8.41 m
4.5 m	kg					*13,110	*13,110	*11,200	*11,200			*8,700	*8,700	8.93 m
3.0 m	kg					*14,840	*14,840	*12,050	11,050	*10,630	8,480	*8,720	8,240	9.17 m
1.5 m	kg					*16,170	14,450	*12,790	10,660	*10,850	8,320	*9,010	8,130	9.15 m
G.L.	kg					*16,720	14,110	*13,150	10,430			*9,640	8,410	8.88 m
-1.5 m	kg			*21,550	*21,550	*16,350	14,090	*12,790	10,430			*10,810	9,220	8.34 m
-3.0 m	kg	*24,720	*24,720	*19,170	*19,170	*14,750	14,360					*10,670	*10,670	7.45 m
-4.5 m	kg			*14,540	*14,540							*9,500	*9,500	6.06 m

## Notes:

- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
- Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Arm top defined as lift point.
- The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift

capacity or 75% of tipping load. Lift capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.

- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
- Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.
- The above figures indicate machine capacity, but in practice the machine should not be used for lifting loads.



## STANDARD EQUIPMENT

## ENGINE

- HINO P11C-WF diesel engine with turbocharger and intercooler
- Automatic engine deceleration
- Auto Idle Stop (AIS)
- Batteries (2 x 12 V - 112 Ah)
- Starting motor (24 V - 6 kW), 60 amp alternator
- Automatic engine shut-down for low engine oil pressure
- Engine oil pan drain valve
- Double element air cleaner
- Battery shut down
- Pre-air cleaner
- Emergency engine shut-off switch

## BOOM, ARM &amp; BUCKET

- 7.00 m SHD boom
- 3.00 m SHD arm
- 6.50 m ME boom (only for SK520XDLC)
- 2.60 m ME arm (only for SK520XDLC)

## CONTROL

- Working mode selector (H-mode, S-mode and ECO-mode)
- Power Boost

## SWING SYSTEM &amp; TRAVEL SYSTEM

- Swing rebound prevention system
- Two-speed travel with automatic shift down
- Sealed & lubricated track links
- Grease-type track adjusters
- 600 mm HD triple grouser shoe
- Lower frame guard
- Traveling alarm
- Automatic swing brake
- Tow eyes
- Four track guides each side
- Straight propel system

## HYDRAULIC

- Arm interflow system
- Auto warm up system
- Aluminum hydraulic oil cooler
- Hydraulic fluid filter clog detector

## MIRRORS &amp; LIGHTS

- Two rear view mirrors, right bottom clearance mirror
- Five front working lights (Two for boom, one for right storage box and two for cab)

## CAB &amp; CONTROL

- Two control levers, pilot-operated
- Horn, electric
- Cab light (interior)
- Luggage tray
- Large cup holder
- Detachable two-piece floor mat
- Headrest
- Handrails
- Intermittent windshield wiper with double-spray washer
- Skylight
- Tinted safety glass
- Pull-up type front window and removable lower front window
- Easy-to-read multi-display color monitor
- Automatic air conditioner
- Emergency escape hammer
- KOMEXS
- Mechanical suspension seat
- 12 V outlet
- Heavy counterweight for ME specification

## OPTIONAL EQUIPMENT

- |                                 |                             |                                 |                                       |
|---------------------------------|-----------------------------|---------------------------------|---------------------------------------|
| ■ Refueling pump                | ■ N&B Piping (foot control) | ■ Top guard                     | ■ 2.1m <sup>3</sup> HD bucket         |
| ■ Rear view camera              | ■ Air suspension seat       | ■ Walk way                      | ■ 2.5m <sup>3</sup> Reinforced bucket |
| ■ 600 mm HD double grouser shoe | ■ Front guard               | ■ Yellow rotating warning light | ■ 3.1m <sup>3</sup> ME bucket         |
|                                 |                             |                                 | ■ 3.4m <sup>3</sup> ME bucket         |

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.

## EXCAVATOR REMOTE MONITORING SYSTEM

KOMEXS (Kobelco Monitoring Excavation System) is a satellite-based system for receiving machine information. Manage your machines anywhere in the world using the Internet. Location, workload and diagnostic data aid business operations.

## Direct Access to Operational Status

## Location Data

Accurate location data can be obtained even from sites where communications are difficult.

## Operating Hours

A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable. Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

## Fuel Consumption Data

Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.

## Graph of Work Content

The graph shows how working hours are divided among different operating categories, including digging, idling, traveling, and optional operations (N&B).

Note: Remote monitoring system is not applicable in some area due to country regulation of the communication lines or availability of infrastructure.



## Maintenance Data and Warning Alerts

## Machine Maintenance Data

Provides maintenance status of separate machines operating at multiple sites. Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.

## Security System

## Engine Start Alarm

Sends a notification if the engine is started outside of pre-defined hours.

## Area Alarm

Sends a notification if the machine leaves a pre-defined area.

Note: This catalogue may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice.

Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalogue may be reproduced in any manner without notice.

## KOBELCO CONSTRUCTION MACHINERY EUROPE B.V.

Veluwezoom 15  
1327 AE Almere  
The Netherlands  
www.kobelco-europe.com

Enquiries To: